



20' & 28' MOBILE SHOWER TRAILERS

Our 20' shower trailer features 6 private suites individually accessed on both sides of the trailer, each with a deadbolt locked changing area containing benches, mirrors and clothing wall hooks.

Our 28' shower trailer features 8 private suites each with a changing area, shower and private lock. Powered by tankless water heaters, the trailer has configuration flexibility for optimized male/female utilization to support varied field missions, and features a seamless non-wood wall, floor and ceiling construction that optimizes cleanliness while minimizing opportunities for mold and mildew.

See back for specifications






SPECIFICATIONS

20' SHOWER TRAILER

Number of stations	6
Weight	8,980 lbs
Weight (max.)	15,300 lbs
Length w/tongue	20' 24'
Width	8'5"
Height	12'
Fresh tank	200 gal
Waste tank	715 gal

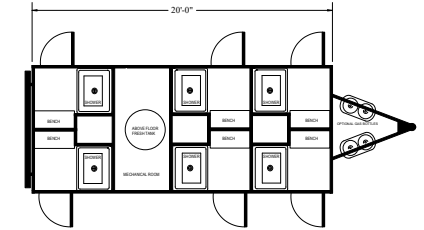


TOWING & HOOK-UP

Vehicle:	2-5/16" ball hitch; w/round 7 Pin/slot plug to tow vehicle for lights & electric wheel brakes
Electric:	Standard 120V, single phase; can convert between 20 & 30 Amp; 20 Amp electrical shore line cord
Propane:	(2) 30lb LP gas tanks on A-frame w/standard OPD valve/connectors
Freshwater:	Uses 3/4" standard city water hook-up to 200 gal tank
Grey Water:	Uses 3" dump valve with ball shut-off from 715 gal tank

28' SHOWER TRAILER - MODEL SHOWN

Number of stations	8
Weight	11,450 lbs
Weight (axle)	(2)7,000 lbs
Length w/tongue	28' 33'
Width (floor plan)	8'
Width (road)	8'5"
Width (steps out)	10'6"
Height w/AC	11'6"
Fresh tank	200 gal
Waste tank	1,150 gal

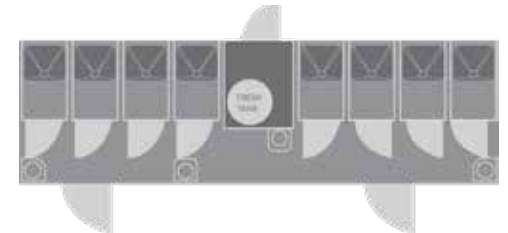

TOWING & HOOK-UP

Vehicle:	2-5/16" ball hitch; w/round 7-pin/slot plug to tow vehicle
Electric:	120V, single phase; (4) cords each cord on unit will not draw more than 20 Amps. (3 for summer operation; 4 for winter operation) individual 20 Amp circuits
Propane:	(4) 40 lb LP tanks (liquid propane) on hitch for water heating w/standard OPD valve/connector
Freshwater:	Uses 3/4" standard city water hook-up inlet to 200 gal tank, staged to on board pump for pressure
Grey Water:	3" pipe thread, to 2" Quick Connect Cam lock connection (convertible to 3") from 1150 gal tank

** some trailers may have some variance*